

VELVET Power 1 Spot IP54

Ref.: VP1SPIP54NY

Datasheet: November 2024 / Page 1





1x1 foot bicolor weatherproof concentrated long distance beam light LED panel

Hard and soft light in the same fixture. Rainproof IP54 bicolor rated panel. Long throw concentrated beam of 15° or 30°. High TLCI (97). Precise color temperature adjustment from 2700K to 6500K. Totally silent fanless operation. Robust and lightweight, low-carbon aluminum body. High efficiency means 100% light output even with V-lock / Gold mount batteries. DMX-RDM control.

[More info](#)

[Website](#)

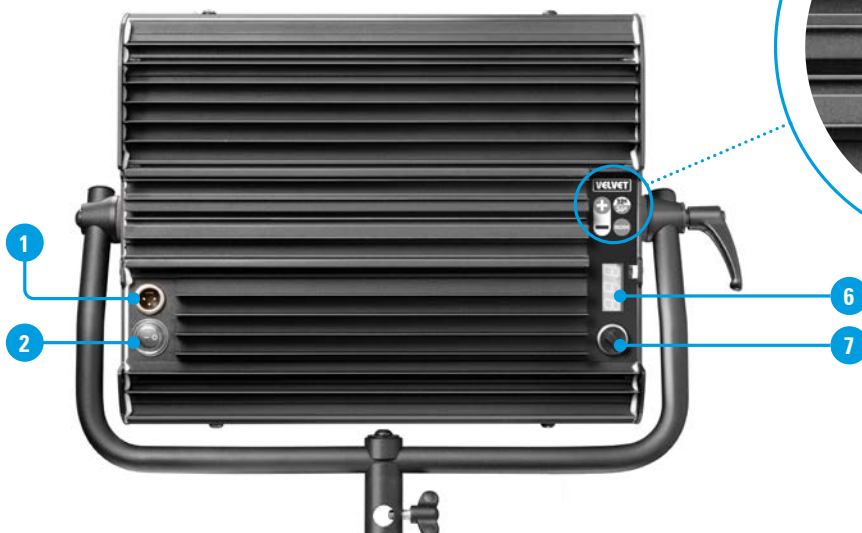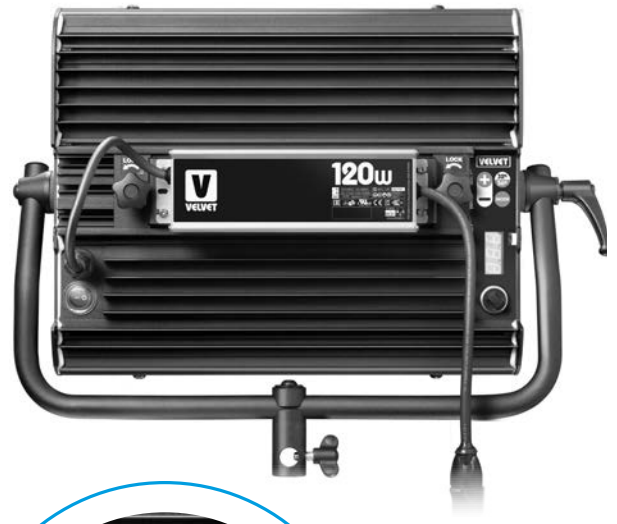

1. XLR-3 DC In
2. Power switch
3. + / - Adjustment buttons
4. 3200K / 5600K Quick access button
5. Mode selection button (Dimmer / Colour Temp)
6. Digital display
7. XLR-5 DMX In

VELVET Power 1 Spot IP54

Ref.: VP1SPIP54NY


Datasheet: November 2024 / Page 2




SPECIFICATIONS

COLOUR TEMPERATURE	Adjustable from 2700K a 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In connector (In & Out with DMX splitter)
TLCI INDEX	98 at 3200K and 96 at 5600K
PHOTOMETRICS	6000 lux / 557 fc at 3m / 9.8 feet 1700 lux / 165 fc at 6m / 20 feet
BEAM ANGLE	15° Nominal 30° With D25 filter 45° With D50 filter 90° With D100 filter 105° With DVELVET filter
DIMENSIONS	380x308x68mm / 15"x12"x2.7" (panel) 495x395x68mm / 19.5"x15.5"x2.7" (panel + yoke)
WEIGHT	4.2 kg / 9.3 lbs (panel) 4.7 kg / 10.4 lbs (panel + yoke)
POWER DRAW	100 W / 0.91 Amps at 110 VAC
POWER SUPPLY	12-35V DC via XLR3 V-Lock or Gold mount battery plate 90-264V AC 50/60Hz
LED RATED LIFE	More than 50.000 hours
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP54 rainproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN High-power LED + VELVET custom optics + CPU software control
CONSTRUCTION & FINISH	Made of black powdercoated extruded and sheet aluminum

VELVET Power 1 IP54 + MO Yoke

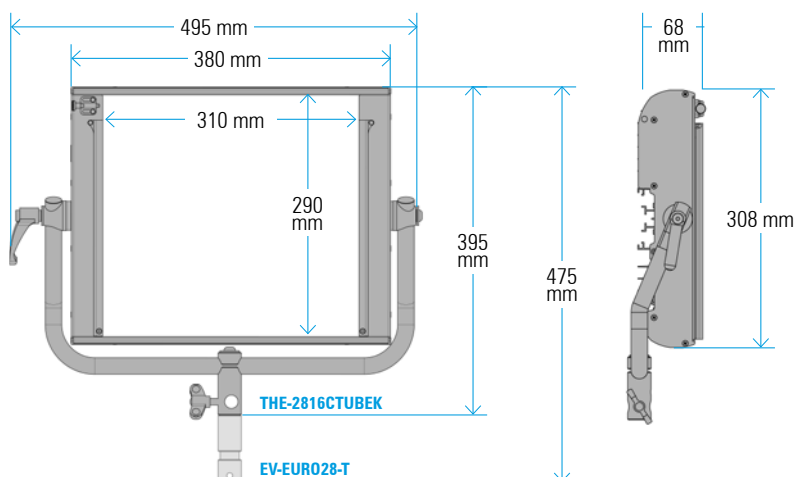

VELVET Power 1 IP54 + PO Yoke

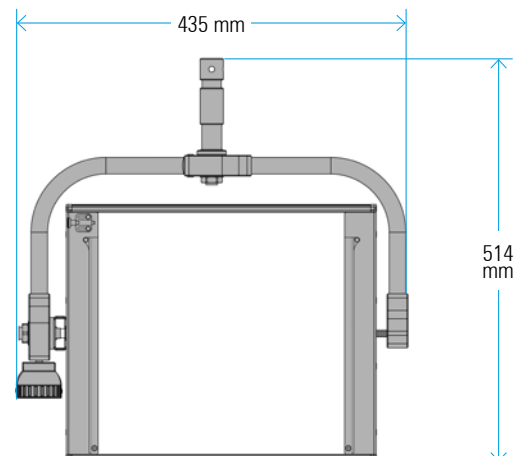

VELVET Power 1 Spot IP54

Ref.: VP1SPIP54NY

Datasheet: November 2024 / Page 3



PHOTOMETRICS

DIAMETER

∅ 0,8m/ 2.6'

∅ 1,3m/ 4.2'

	15°	28500 lux 2648 fc	9200 lux 855 fc	4300 lux 400 fc	2250 lux 209 fc	1600 lux 149 fc	1200 lux 111 fc	Power 1 100W 0,40A/220V 0,90A/110V
		37000 lux 3437 fc	12800 lux 1189 fc	6000 lux 557 fc	3600 lux 334 fc	2400 lux 223 fc	1700 lux 158 fc	
DISTANCE		1m/ 3.2'	2m/ 6.5'	3m/ 9.8'	4m/ 13'	5m/ 16.4'	6m/ 19.6'	

