

VELVET Power 2x2 Spot IP54

Ref.: VP2X2SPIP54NY

Datasheet: November 2024 / Page 1




2x2 feet bicolor weatherproof concentrated long distance beam light LED panel

Hard and soft light in the same fixture. Rainproof IP54 bicolor rated panel. Long throw concentrated beam of 15° or 30°. High TLCI (97). Precise color temperature adjustment from 2700K to 6500K. Totally silent fanless operation. Robust and lightweight, low-carbon aluminum body. High efficiency means 100% light output even with V-lock / Gold mount batteries. DMX-RDM control.

More info

[Website](#)

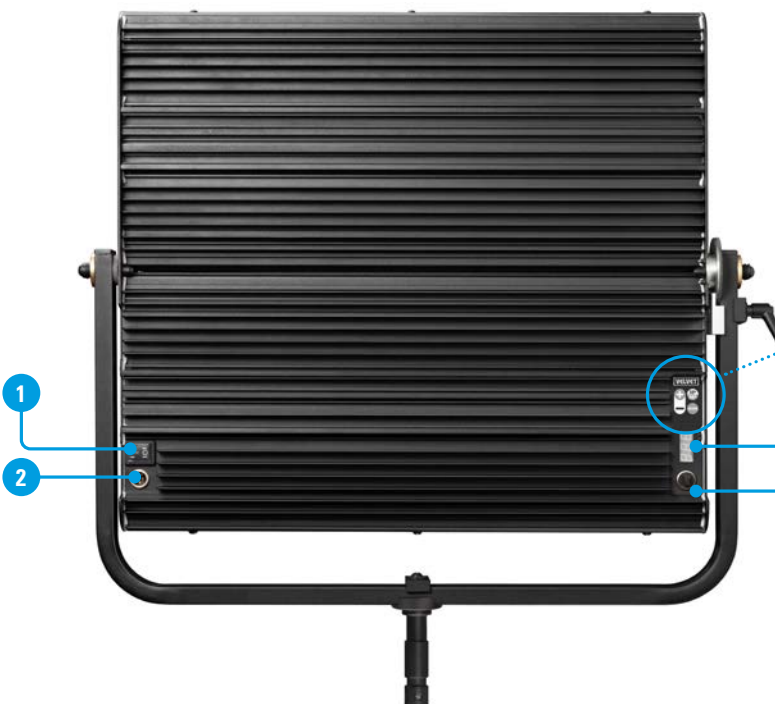

1. Power switch
2. XLR-3 DC In
3. + / - Adjustment buttons
4. 3200K / 5600K Quick access button
5. Mode selection button (Dimmer/ Colour Temp)
6. Digital display
7. XLR-5 DMX In

VELVET Power 2x2 Spot IP54

Ref.: VP2X2SPIP54NY


Datasheet: November 2024 / Page 2




SPECIFICATIONS

COLOUR TEMPERATURE	Adjustable from 2700K a 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In connector (In & Out with DMX splitter)
TLCI INDEX	98 at 3200K and 96 at 5600K
PHOTOMETRICS	23000 lux / 2137 fc at 3m / 9.8 feet 7000 lux / 650 fc at 6m / 20 feet
BEAM ANGLE	15° Nominal 30° With D25 filter 45° With D50 filter 90° With D100 filter 105° With DVELVET filter
DIMENSIONS	690x620x68mm / 27"x24.5"x2.7" panel 770x750x125mm / 30"x29.5"x5" panel + yoke + PSU
WEIGHT	14 kg / 31 lbs panel 16 kg / 35.3 lbs panel + yoke 20 kg / 44 lbs panel + yoke + PSU
POWER DRAW	410W (14.6 Amps at 28 VDC – 1.86 Amps at 230VAC)
POWER SUPPLY	26-28V DC 90-264V AC 50/60Hz
LED RATED LIFE	More than 50.000 hours
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP54 rainproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN High-power LED + VELVET custom optics + CPU software control
CONSTRUCTION & FINISH	Made of black powdercoated extruded and sheet aluminum

VELVET Power 2x2 IP54 + M0 Yoke

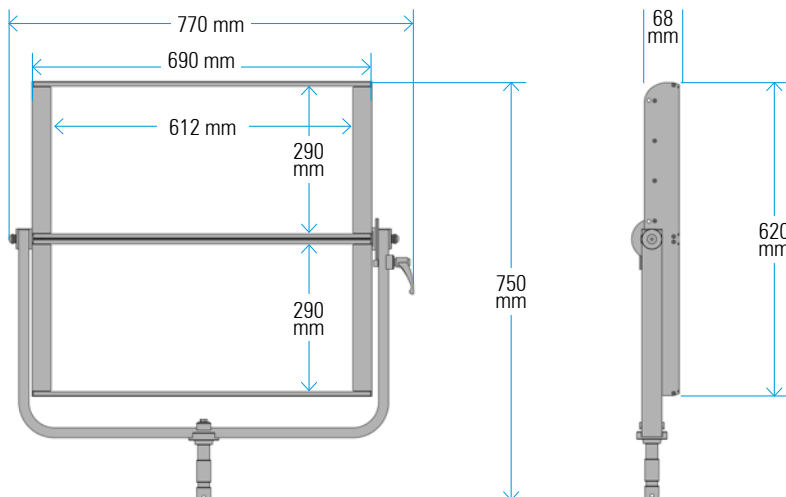

VELVET Power 2x2 IP54 + P0 Yoke

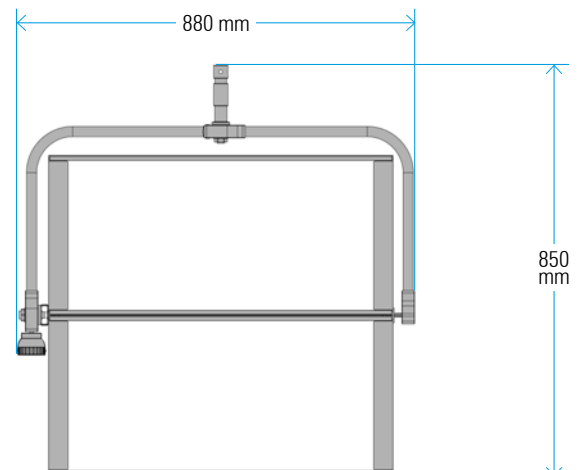

VELVET Power 2x2 Spot IP54

Ref.: VP2X2SPIP54NY

Datasheet: November 2024 / Page 3



PHOTOMETRICS

