

VELVET Power 2 Studio 30° IP51



Ref.: VP2ST

Datasheet: November 2021 / Page 1

2x1 feet bicolor dustproof AC powered concentrated long distance beam light LED panel

[Click here for more product information](#)

VP2ST includes: 1x VELVET Power 2 30° Studio LED panel IP51 dustproof with DMX XLR5 in&out, 1x yoke w 16mm baby receiver and 28mm junior pin, 1x 3,5mts power with aerial PowerCon TRUE1



1. XLR-3 DC IN
2. Power switch
3. +/− Adjustment buttons
4. 3200K/ 5600K Quick access button
5. Mode selection button (Dimmer/ Colour Temp)
6. XLR DMX-5 OUT
7. Digital display
8. XLR-5 DMX IN



VELVET Power 2 Studio 30° IP51




Ref.: VP2ST

Datasheet: November 2021 / Page 2


SPECIFICATIONS

COLOUR TEMPERATURE	Adjustable from 2700K a 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX DMX-RDM with XLR-5 IN connector
TLCI INDEX	98 at 3200K and 96 at 5600K
PHOTOMETRICS	4950 lux / 460 fc at 3m / 9.8 feet 1330 lux / 124 fc at 6m / 20 feet
BEAM ANGLE	30° Nominal 45° With D25 filter 60° With D50 filter 105° With D100 filter 115° With DVELVET filter
DIMENSIONS	690x308x68mm / 27.2"x12"x2.7" (panel) 815x435x68mm / 32.1"x17.1"x2.7" (panel+yoke)
WEIGHT	7 kg / 15,5 lbs (panel) 7.6 kg / 16.7 lbs (panel + yoke)
POWER DRAW	190W
POWER SUPPLY	90-264V AC 50/60Hz through XLR3 connector
LED RATED LIFE	More than 50.000 hours
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP51 dustproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN High-power LED + VELVET custom optics + CPU software control
CONSTRUCTION & FINISH	Made of black powdercoated extruded and sheet aluminum

VELVET Power 2 IP54 + MO Yoke

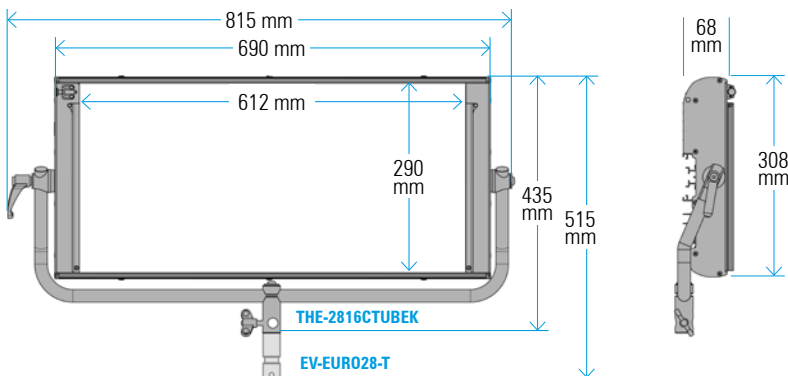

VELVET Power 2 IP54 + PO Yoke

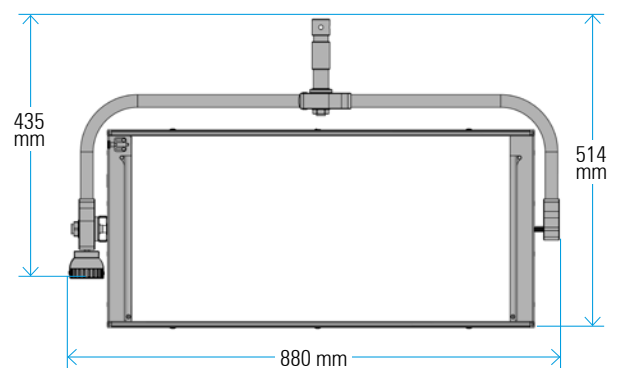




VELVET Power 2 Studio 30° IP51

Ref.: VP2ST


Datasheet: November 2021 / Page 3



PHOTOMETRICS

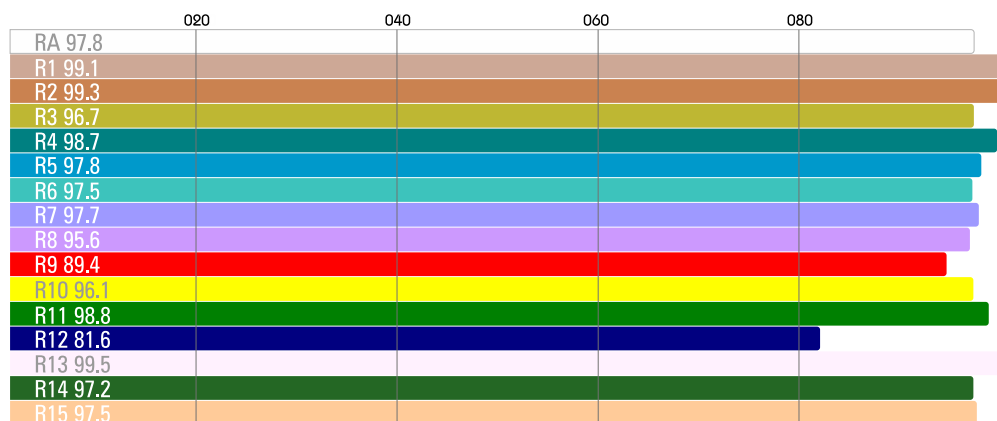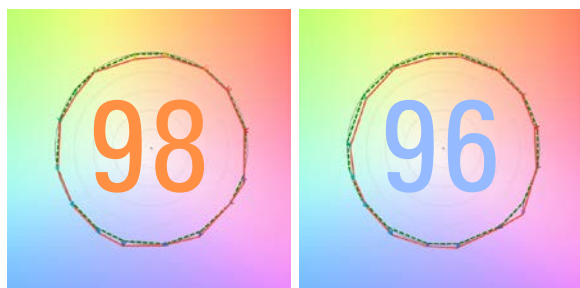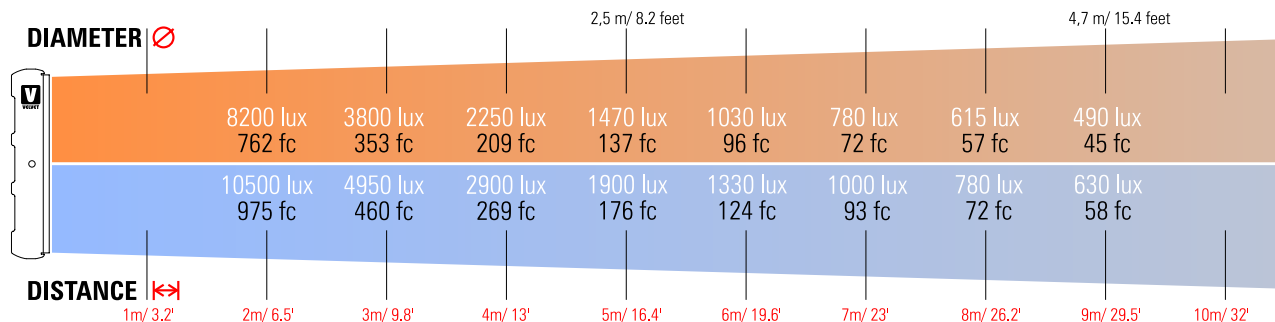

CCT 3220K

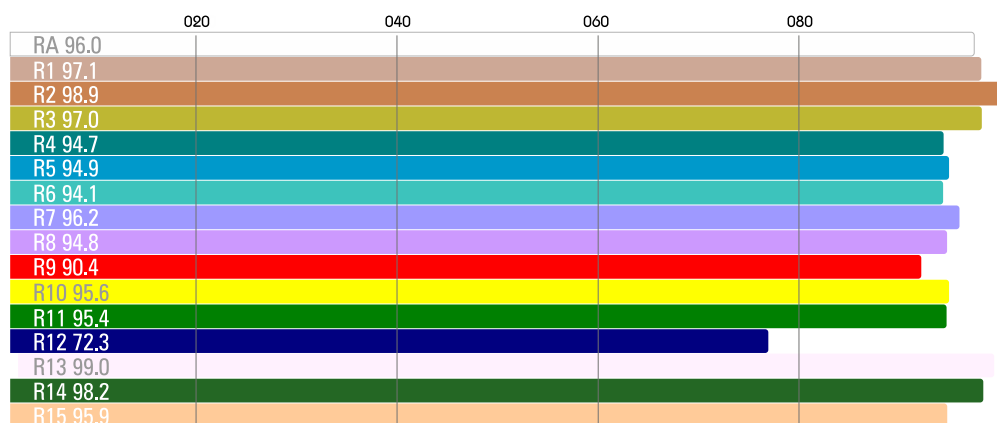

CCT 5440K

VELVET Power 2 Studio 30° IP51



Ref.: VP2ST

Datasheet: November 2021 / Page 4

ACCESSORIES

POWER SUPPLY		RIGGING					
	VP2ST-PSU		VL2-QLS		VL2-YPO		
BEAM CONTROL							
	VL2-RB		VP2-D25		VP2-D50		VP2-D100
	VP2-DVL		VP2-FBAG		VL2-SG		VL2-SG20
	VL2-SG60		VL2-SB		VL2-SGXSB		2X1-RABBITREC
	OCTA-SBR05		OCTA5-SG				
TRANSPORT			REMOTE CONTROL				
	VL2-BAG		VL2-CASE		VL-RC		