

## 2x1 feet weatherproof soft light LED panel R+G+B+W+CW with wireless control

Natural soft light color 5LED panel. Weatherproof IP54 rated. High color reproduction. High SSI, TLCI & CRI (96). Perfect skin tones and real colors. Robust, lightweight, low-carbon aluminum body. Totally silent fanless operation. High efficiency: 100% output even with batteries. Available V-lock / Gold mount. DMX-RDM, LumenRadio CRMX, Wi-fi Artnet and Bluetooth.

[More info](#)

[Website](#)




1. Accessories mounting plate
2. Light power buttons
3. Digital display
4. Up and down scroll buttons
5. Enter / + / - Adjustment buttons
6. 3200K / 5600K quick access buttons
7. Back button
8. Mode selection / Lock buttons
9. XLR-5 DMX-RDM In & Out connector
10. Main power switch
11. XLR-3 DC In connector
12. Mini USB connector



## SPECIFICATIONS

COLOUR TEMPERATURE	Continuously adjustable from 2500K to 10.000K
GREEN-MAGENTA	Continuously adjustable from full minusgreen to full plusgreen
COLOR SPECTRUM	Full color spectrum R+G+B+W+CW with hue, saturation, and base colortemperature control
CONTROL COLOR MODES	CCT, HSI, RGB, Gels and Effects base Kelvin white light can be set combined with any color
LIGHT INTENSITY	Dimmable 0 to 100, smooth and flicker-free
LOCAL CONTROL	With 8x shock resistant buttons and color display
WIRE CONTROL	DMX-RDM with XLR-5 in connector
WIRELESS CONTROL	DMX-RDM with LumenRadio, CRMX Wi-Fi Art-Net +VELVET Goya App, Bluetooth
TLCI INDEX	96 at 3200 and 97 at 5600K
PHOTOMETRICS	1550 lux / 144 fc at 3m / 10 feet 410 lux / 38 fc at 6m / 20 feet
BEAM ANGLE	95°
DIMENSIONS	753 x 318 x 92mm / 29.6 x 12.5 x 3.6 inches
WEIGHT	6.9 kg / 15.2 lbs (panel) 7.6 kg / 16.7 lbs (panel + yoke)
POWER DRAW	225W (0.98A at 220VAC — 2.0A at 110VAC)
POWER SUPPLY	24-35V DC (XLR3). VLock/ Gold Mount battery plate 90-264V AC 50/60Hz
LED RATED LIFE	More than 50.000 hours
POWER CONNECTION	Neutrik PowerCon TRUE1 TOP In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	Silent and fan-free passive cooling
PROTECTION	IP54 weatherproof, indoor or outdoor use
VELVET LED CYC TECHNOLOGY	Selected BIN LED core unit + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 28mm junior pin, multiple ¼"-20 rigging points, pole-operated yoke.
QUICK MOUNTING ACCESSORIES	Foldable SnapBag, foldable Snapgrid, removable barn doors, cordura case, hard case
CONSTRUCTION & FINISH	Fixture and yoke made of 100% black powdercoated extruded and sheet aluminum

## WIRE VIEW

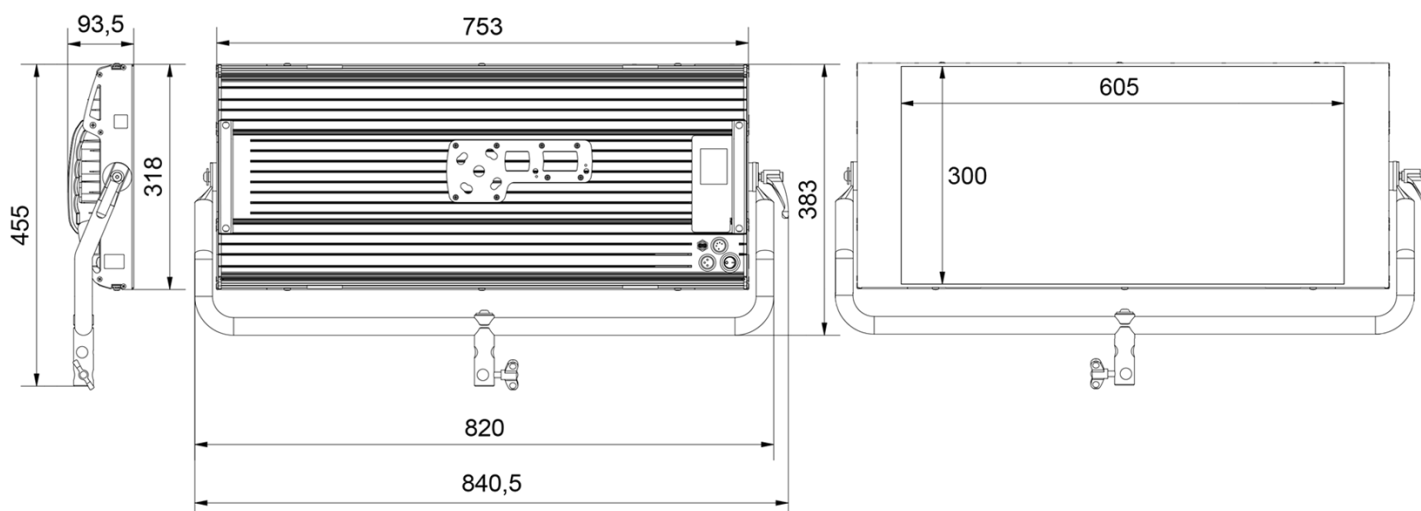

## PHOTOMETRICS

DIAMETER		Ø 3,2m/ 10.4'			Ø 6,2m/ 20'			EVO 2	
	<b>90°</b>	8742 lux 812 fc	2820 lux 262 fc	1450 lux 135 fc	804 lux 75 fc	528 lux 49 fc	384 lux 36 fc	225W	0.98A/220V 2.0A/110V
		9419 lux 875 fc	3045 lux 283 fc	1550 lux 144 fc	858 lux 80 fc	565 lux 52 fc	410 lux 38 fc	96	97
<b>DISTANCE</b>		1m/ 3.2'	2m/ 6.5'	3m/ 9.8'	4m/ 13'	5m/ 16.4'	6m/ 19.6'		

