

EVO 2x2 IP54

Ref.: VE2X2CIP54

Datasheet: November 2024 / Page 1




2x2 feet weatherproof soft light LED panel R+G+B+W+CW with wireless control


Natural soft light color 5LED panel. Weatherproof IP54 rated. High color reproduction. High SSI, TLCI & CRI (96). Perfect skin tones and real colors. Robust, lightweight, low-carbon aluminum body. Totally silent fanless operation. High efficiency: 100% output even with batteries. Available V-lock / Gold mount. DMX-RDM, LumenRadio CRMX, Wi-fi Artnet and Bluetooth.

[More info](#)

[Website](#)

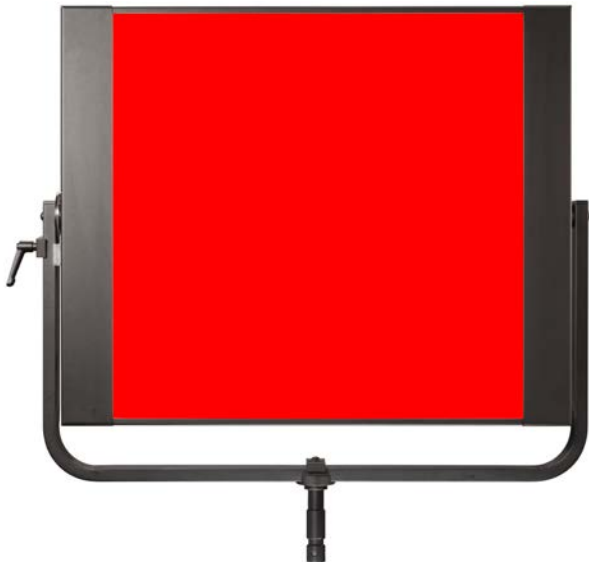


1. Mini USB connector
2. XLR-5 DMX-RDM In & Out connector
3. Accessories mounting plate
4. Light power button
5. Digital display
6. Up and down scroll buttons
7. Enter / +/- Adjustment buttons
8. 3200K / 5600K quick access button
9. Back button
10. Mode selection / Lock button
11. XLR-3 DC In connector
12. Main power switch

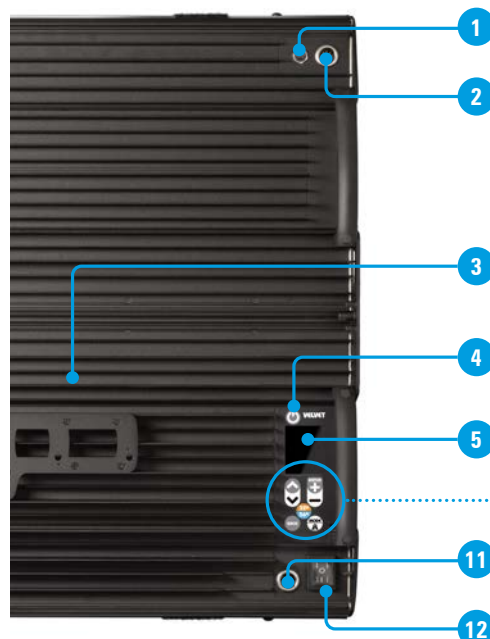

SPECIFICATIONS

COLOUR TEMPERATURE	Continuously adjustable from 2500K to 10000K
GREEN-MAGENTA	Continuously adjustable from full minusgreen to full plusgreen
COLOR SPECTRUM	Full color spectrum R+G+B+W+CW with hue, saturation, and base colortemperature control
CONTROL COLOR MODES	CCT, HSI, RGB, Gels and Effects base Kelvin white light can be set combined with any color
LIGHT INTENSITY	Dimmable 0 to 100, smooth and flicker-free
LOCAL CONTROL	With 8x shock resistant buttons and color display
WIRE CONTROL	DMX-RDM with XLR-5 In connector
WIRELESS CONTROL	DMX-RDM with LumenRadio, CRMX Wi-Fi Art-Net + VELVET Goya App, Bluetooth
TLCI INDEX	96 at 3200K and 97 at 5600K
PHOTOMETRICS	2405 Lux / 223 fc at 3m / 10 feet 700 Lux / 65 fc at 6m / 19.6 feet
BEAM ANGLE	115°
DIMENSIONS	763 x 620 x 93mm / 30 x 24.4 x 3.6 inches
WEIGHT	13 kg / 28.6 lbs (panel) 15.3 kg / 33.7 lbs (panel + yoke)
POWER DRAW	403W (1.75A at 220VAC — 3.6A at 110VAC)
POWER SUPPLY	28V DC (XLR3). 90-264V AC 50/60Hz
LED RATED LIFE	More than 50.000 hours
POWER CONNECTION	Neutrik PowerCon TRUE1 TOP In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	Silent and fan-free pasive cooling
PROTECTION	IP54 weatherproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN LED core unit + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 16mm baby receptacle combined with 28mm junior pin, multiple 1/4"- 20 rigging points, pole operated yoke.
QUICK MOUNTING ACCESSORIES	Foldable SnapBag, foldable Snapgrid, removable barn doors, cordura case, hard case
CONSTRUCTION & FINISH	Fixture and yoke made of black powdercoated extruded and sheet aluminum

WIRE VIEW

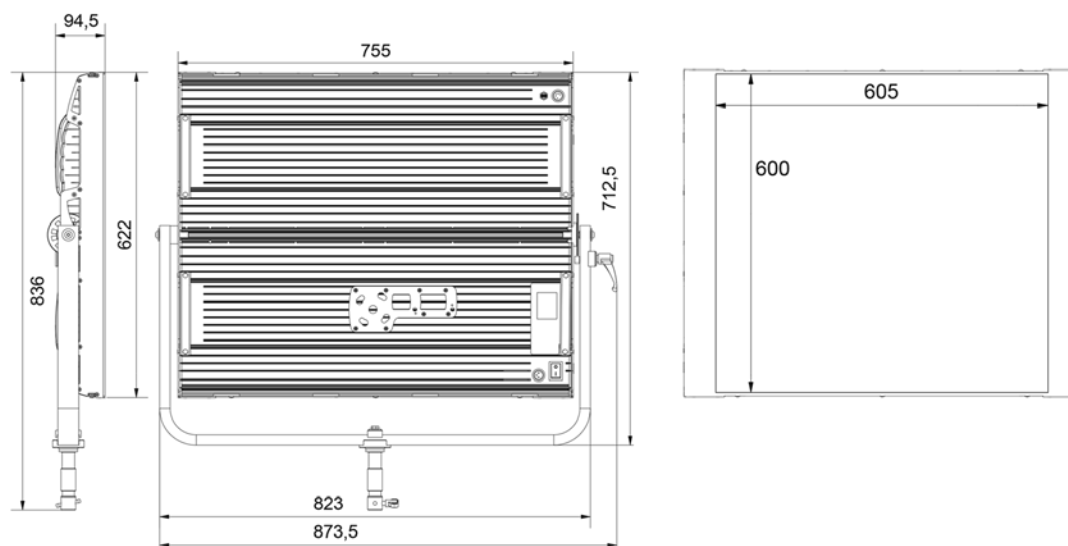

PHOTOMETRICS

