

# VELVET Mini 1 DMX IP54

Ref.: VM1IP54VLDMXNY

Datasheet: November 2024 / Page 1




## 1x1/2 foot bicolor weatherproof compact panoramic soft light LED panel

Natural soft light panel for low ceilings. Weatherproof IP54. High TLCI & CRI (96). Precise color temperature adjustment from 2700K to 6500K. Perfect skin tones and real colors. Lightweight, low-carbon aluminum body. Totally silent fanless operation. High efficiency means 100% output even with batteries. DMX-RDM control. Optional DMX In/Out splitter.

[More info](#)

[Website](#)

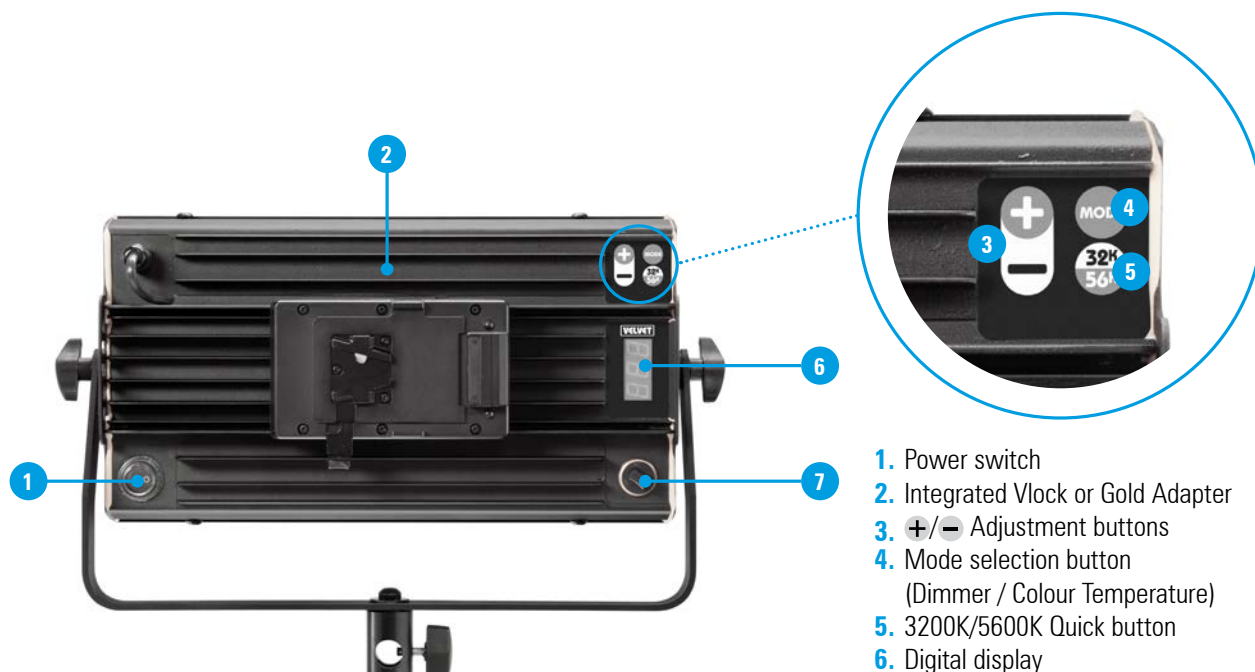

1. Power switch
2. Integrated Vlock or Gold Adapter
3. +/- Adjustment buttons
4. Mode selection button (Dimmer / Colour Temperature)
5. 3200K/5600K Quick button
6. Digital display
7. XLR-5 DMX-RDM In

# VELVET Mini 1 DMX IP54

Ref.: VM1IP54VLDMXNY


Datasheet: November 2024 / Page 2



## SPECIFICATIONS

COLOUR TEMPERATURE	Adjustable from 2700K a 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In connector (In & Out with DMX splitter)
TLCI INDEX	97 at 3270K and 98 at 5740K
PHOTOMETRICS	1200 lux / 111 fc at 1m / 3 feet 170 lux / 16 fc at 3m / 10 feet
BEAM ANGLE	100°
DIMENSIONS	345 x 190 x 90 mm / 13,6"x7,5"x3,5" (panel)
WEIGHT	1,9 kgs / 4,2 lbs (panel)
POWER DRAW	50W (0.45A at 110 VAC — 0.22A at 220 VAC)
POWER SUPPLY	Vock or Gold battery mount 90-264 VAC 50/60Hz through Smart AC adapter
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP54 rainproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN LED + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 16mm baby receptacle combined with 28mm junior pin, four sliding threads 1/4" for riggings located on panel sides, double baby pin for diagonal or vertical position using the standard yoke
QUICK MOUNTING ACCESSORIES	Smart AC power supply, VELVET DMX remote control, foldable Snapgrid, foldable SnapBag softbox, removable barn doors, cordura case, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum

## WIRE VIEW

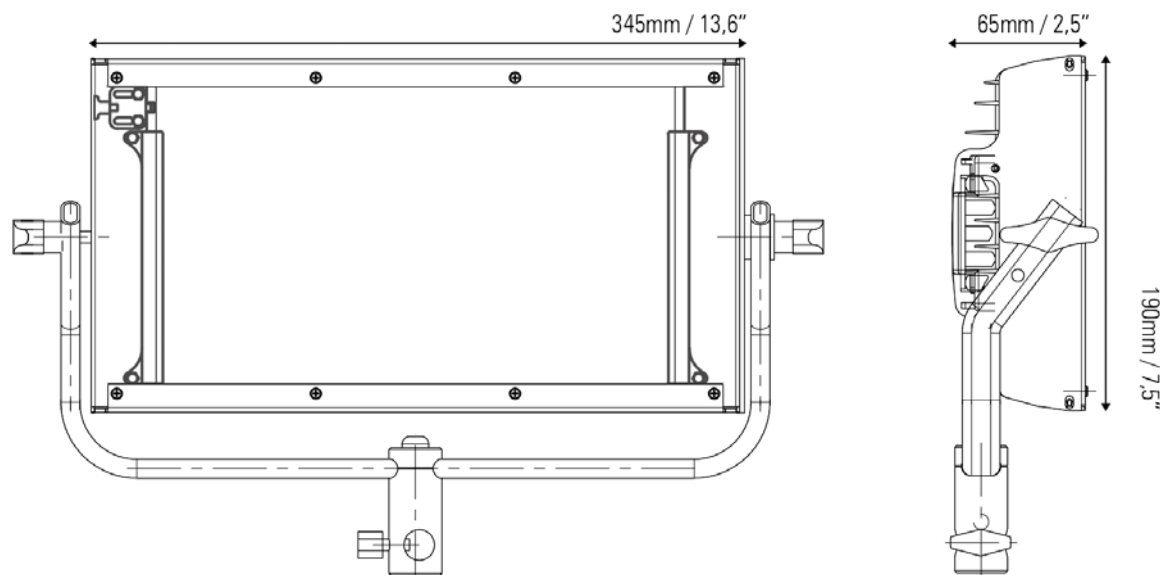

# VELVET Mini 1 DMX IP54

Ref.: VM1IP54VLDMXNY

Datasheet: November 2024 / Page 3



## PHOTOMETRICS

DIAMETER

∅ 1,5m / 4.9'

