

## 1x1 feet bicolor IP41 AC powered soft light LED panel


Natural soft light panel. Dustproof IP41 rated. High TLCI (96). Precise color temperature adjustment from 3000K to 6000K. Perfect skin tones and real colors. Lightweight, low-carbon aluminum body. Totally silent fanless operation. High efficiency with built-in PSU on-board and DMX RDM control with AC & DMX In & Out built-in connectors.

More info

[Website](#)



1. XLR-3 DC In
2. Power switch
3. XLR DMX-5 Out
4. + / - Adjustment buttons
5. 3200K / 5600K Quick access button
6. Mode selection button (Dimmer / Colour Temp)
7. Digital display
8. XLR-5 DMX In

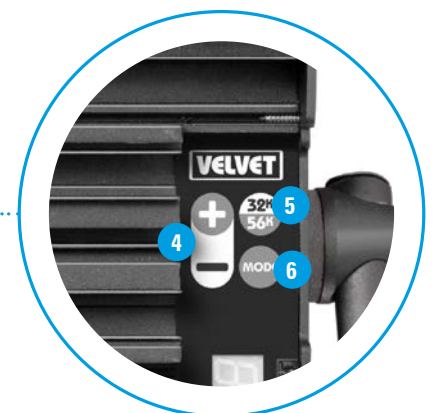

# VELVET Start 1

Ref.: VS1STNYC


Datasheet: November 2024 / Page 2



## SPECIFICATIONS

COLOUR TEMPERATURE	Continuously adjustable from 3.000K to 6.000K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100, smooth and flicker-free
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In & Out connectors
TLCI INDEX	92 at 3200K and 95 at 5600K
PHOTOMETRICS	2070 lux / 192 fc at 1m / 3 feet 257 lux / 24 fc at 3m / 10 feet
BEAM ANGLE	100°
DIMENSIONS	384 x 310 x 68,5 / 15.1" x 12.2" x 2.7" (panel) 495x395x68mm / 19.5"x15.5"x2.7" (panel+yoke)
WEIGHT	3,5kg / 7,7 lbs (panel) 4kg / 8,8 lbs (panel + yoke)
POWER DRAW	50W
POWER SUPPLY	90-264 VAC 50/60Hz
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik PowerCon TRUE1 TOP In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP41 index protection
VELVET LED CYC TECHNOLOGY	Selected BIN LED core unit + optic diffuser + CPU software control
RIGGING OPTIONS	aluminum yoke with 16 female combined with 28 pin, pole operated yoke, multipanels yokes
QUICK MOUNTING ACCESSORIES	Foldable SnapBag, foldable Snapgrid, removable barn doors, cordura case, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum

## WIRE VIEW

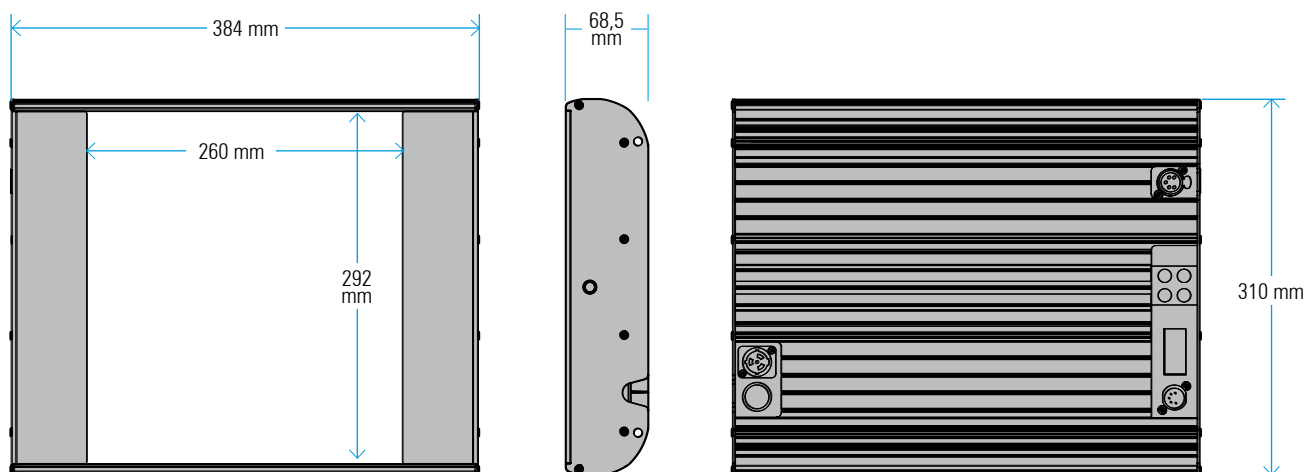

# VELVET Start 1

Ref.: VS1STNYC

Datasheet: November 2024 / Page 3



## PHOTOMETRICS

DIAMETER

∅ 5m/ 16.4'

∅ 7m/ 23'

	<b>100°</b>	1930 lux 179 fc	510 lux 47 fc	250 lux 23 fc	150 lux 14 fc	105 lux 10 fc	78 lux 7 fc	<b>Start 1</b> 50W 0.20A/220V 0.45A/110V
		2070 lux 192 fc	533 lux 49 fc	257 lux 24 fc	158 lux 15 fc	113 lux 10 fc	83 lux 8 fc	
<b>DISTANCE</b>		1m/ 3.2'	2m/ 6.5'	3m/ 9.8'	4m/ 13'	5m/ 16.4'	6m/ 19.6'	

