

VELVET Mini Power 1 IP54

Ref.: VMP1IP54VLDMXNY / VMP1IP54GLDMXNY

Datasheet: November 2024 / Page 1



1x1/2 foot bicolor weatherproof compact panoramic concentrated light LED panel

Two in one compact panel for low ceilings. Rainproof IP54 rated bicolor mini panel. Long throw concentrated beam of 15° or 30°. High TLCI (96). Precise color temperature adjustment from 2700K to 6500K. Totally silent fanless operation. Robust and lightweight low-carbon aluminum body. High efficiency means 100% output even with batteries. V-mount, Gold mount available. DMX-RDM control.

[More info](#)

[Website](#)



1. Power switch
2. Integrated Vlock or Gold Adapter
3. +/- Adjustment buttons
4. Mode selection button (Dimmer / Colour Temperature)
5. 3200K/5600K Quick button
6. Digital display
7. XLR-5 DMX-RDM In

VELVET Mini Power 1 IP54

Ref.: VMP1IP54VLDMXNY / VMP1IP54GLDMXNY


Datasheet: November 2024 / Page 2



SPECIFICATIONS

COLOUR TEMPERATURE	Adjustable from 2700K a 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In connector (In & Out with DMX splitter)
TLCI INDEX	93 at 3200K and 85 at 5600K
PHOTOMETRICS	5100 lux / 474 fc at 1m / 3 feet 650 lux / 60 fc at 3m / 10 feet
BEAM ANGLE	35°
DIMENSIONS	345 x 190 x 90 mm / 13.6"x7.5"x3.5" (panel) 405 x 275 x 90 mm / 16"x 10.8" x 3.5" (panel + yoke)
WEIGHT	2 kgs / 4.4 lbs (panel) 2.3 kgs / 5 lbs(panel + yoke)
POWER DRAW	50W (0.45A at 110 VAC — 0.22A at 220 VAC)
POWER SUPPLY	Vock or Gold battery mount 90-264 VAC 50/60Hz through Smart AC adapter
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP54 rainproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN LED + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 16 baby receiver combined with 28 junior pin, multiple ¼-20"rigging points, multipanels yokes, pole-operated studio yoke
QUICK MOUNTING ACCESSORIES	Smart Vlock AC power supply, quarter, half and full hard diffusion, foldable Snapgrid, removable barn doors, remote control, cordura case, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum

WIRE VIEW

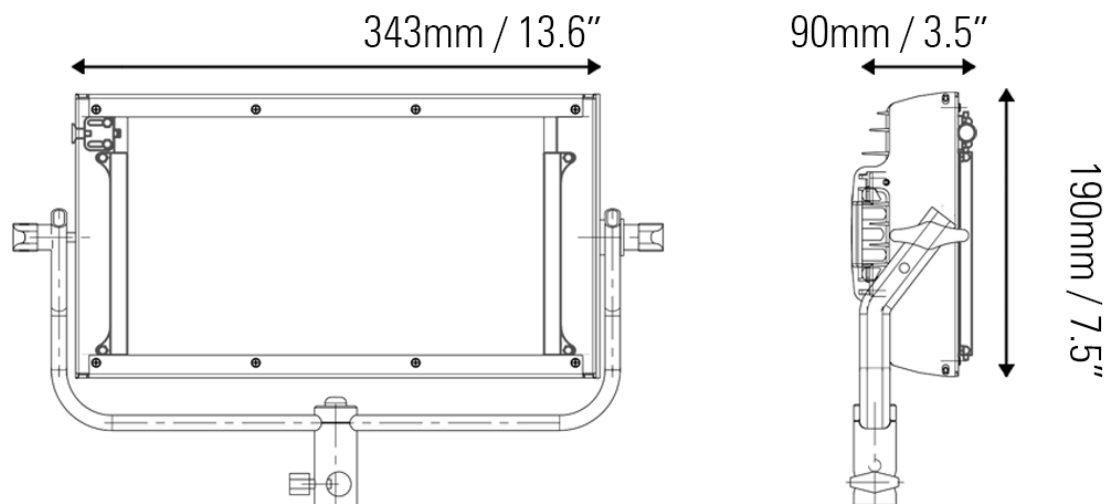

VELVET Mini Power 1 IP54

Ref.: VMP1IP54VLDMXNY / VMP1IP54GLDMXNY

Datasheet: November 2024 / Page 3



PHOTOMETRICS

DIAMETER

∅ 1,5m/ 4.9'

