

VELVET Mini Power 2 IP54

Ref.: VMP2IP54NY

Datasheet: November 2024 / Page 1



2x1/2 feet bicolor weatherproof compact panoramic concentrated light LED panel

Two in one compact panel for low ceilings. Rainproof IP54 rated bicolor mini panel. Long throw concentrated beam of 15° or 30°. High TLCI (96). Precise color temperature adjustment from 2700K to 6500K. Totally silent fanless operation. Robust and lightweight low-carbon aluminum body. High efficiency means 100% output even with batteries. V-mount, Gold mount available. DMX-RDM control.



[More info](#)

[Website](#)



1. Power switch
2. XLR-3 DC In Connector
3. Docking plate
4. + / - Adjustment buttons
5. Mode selection button (Dimmer / Colour Temperature)
6. 3200K / 5600K Quick access button
7. Digital display
8. XLR-5 DMX-RDM In

VELVET Mini Power 2 IP54

Ref.: VMP2IP54NY


Datasheet: November 2024 / Page 2



SPECIFICATIONS

COLOUR TEMPERATURE	Adjustable from 2700K a 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In connector (In & Out with DMX splitter)
TLCI INDEX	93 at 3200K and 85 at 5600K
PHOTOMETRICS	8900 lux / 827 fc at 1m / 3 feet 1250 lux / 116 fc at 3m / 10 feet
BEAM ANGLE	35°
DIMENSIONS	607 x 190 x 90 mm / 24" x 7.5" x 3.5" (panel) 680 x 275 x 90 mm / 26.8"x 10.8" x 3.5" (panel + yoke)
WEIGHT	3 kgs / 6.5 lbs (panel) 3.4 kgs / 7.5 lbs(panel + yoke)
POWER DRAW	100W (0.90A at 110 VAC — 0.44A at 220 VAC)
POWER SUPPLY	Vock or Gold battery mount 90-264 VAC 50/60Hz through Smart AC adapter
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP54 rainproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN LED + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 16 baby receiver combined with 28 junior pin, multiple ¼-20" rigging points, multipanels yokes, pole-operated studio yoke
QUICK MOUNTING ACCESSORIES	Smart Vlock AC power supply, quarter, half and full hard diffusion, foldable Snapgrid, removable barn doors, remote control, cordura case, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum

WIRE VIEW

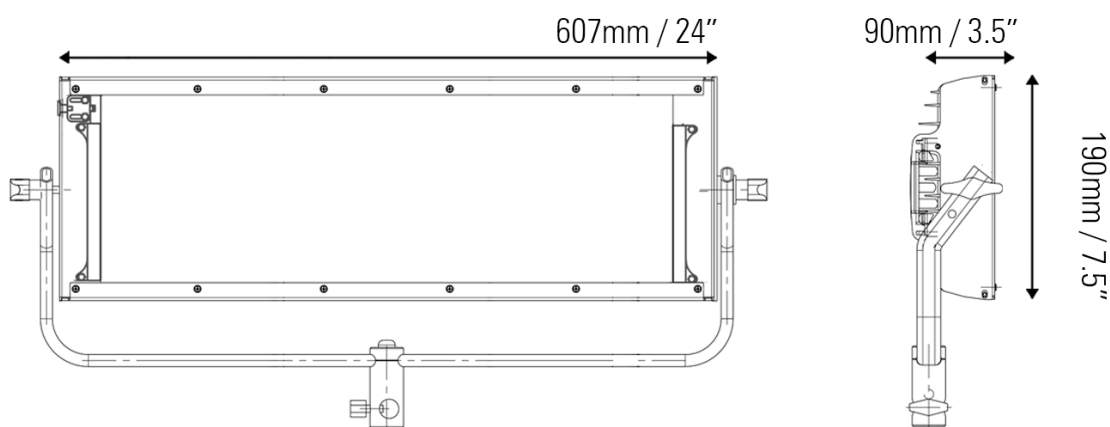


VELVET Mini Power 2 IP54

Ref.: VMP2IP54NY

Datasheet: November 2024 / Page 3



PHOTOMETRICS

DIAMETER		Ø 2,8/ 9.1'			Ø 4,4m/ 14.4'			Mini Power 2	
 35°	7600 lux 706 fc	2350 lux 218 fc	1100 lux 102 fc	630 lux 58 fc	420 lux 39 fc	100W	0,44A/220V	93	85
	8900 lux 827 fc	2750 lux 255 fc	1250 lux 116 fc	730 lux 68 fc	480 lux 44 fc		0,90A/110V		
DISTANCE	1m/ 3.2'	2m/ 6.5'	3m/ 9.8'	4m/ 13'	5m/ 16.4'	6m/ 19.6'			

