


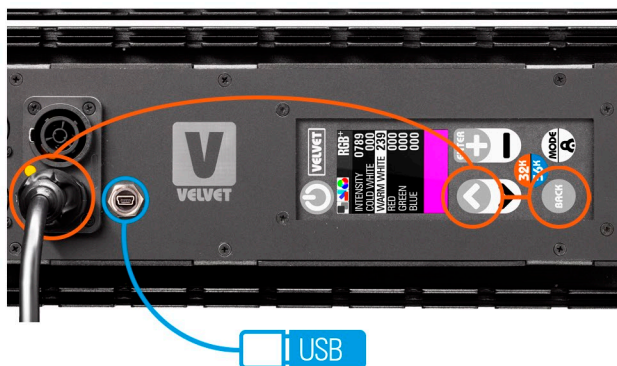


## Tools needed



## 1st step: Driver update


- 1 Save the .drv file with the driver update to install in the root of a USB stick. Never change the Driver's file name. Make sure the Cyc panel is in CCT mode
- 2 Connect the USB stick with the cable (Mini USB male to USB female), provided by VELVET or your authorized dealer.
- 3 Connect the USB memory+USB cable set to the Cyc  
With the Cyc unit turned OFF, simultaneously press  and turn ON the equipment.
- 4 A screen with a software update message will automatically appear on the display. Wait for the progress bar to complete and the screen shows: DRIVER UPDATE DONE!

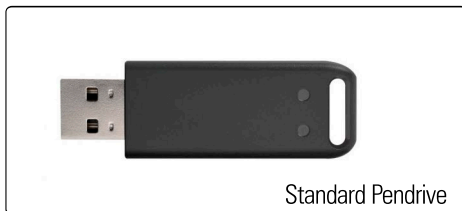





- 5 Turn the Cyc OFF and ON again

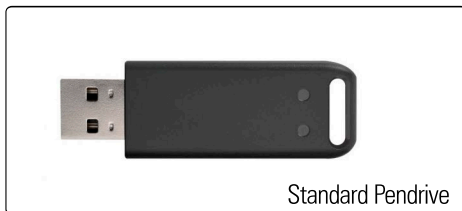
## Proceed to the second step

## Tools needed



## 2nd step: Firmware update

- 1 Save the .frm file with the firmware update to install in the root of a USB stick. Never change the Firmware file's name. Turn ON the equipment and check that the Cyc panel is in CCT mode
- 2 Press  to select "Settings". Select "ABOUT" with  and press .
- 3 Select "FIRMWARE UPDATE" and press  to start the process

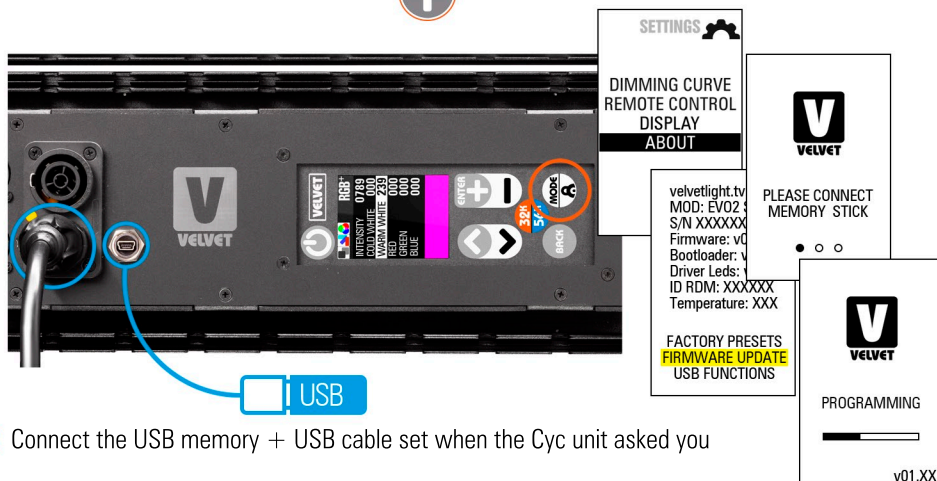

The main image shows the back of the Cyc panel with a USB stick inserted into the port and a USB cable connected to the Mini-USB port. A blue arrow points from the USB stick to a 'USB' label. Overlaid on the right are three screenshots of the panel's interface:

- SETTINGS** menu with options: DIMMING CURVE, REMOTE CONTROL, DISPLAY, ABOUT.
- PLEASE CONNECT MEMORY STICK** screen with a progress bar and 'v01.XX' at the bottom.
- FACTORY PRESETS** screen with **FIRMWARE UPDATE** highlighted in yellow, and 'USB FUNCTIONS' below it.

- 4 Connect the USB memory + USB cable set when the Cyc unit asked you
- 5 Once the firmware update process is finished, the display will show: "UPDATE DONE!". The Cyc panel will proceed to reboot with the new firmware.

If you have problems with your device or with the update, please contact us at: [customers@velvetlight.tv](mailto:customers@velvetlight.tv)

## Your Cyc panel is now updated